


44" STAKED TURBIDITY BARRIER

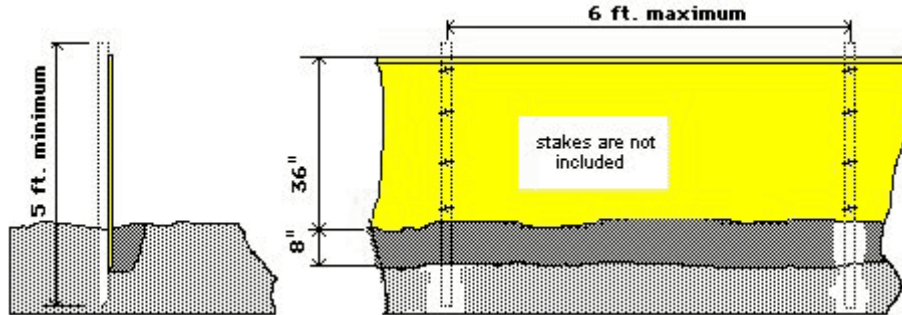

Staked Barrier

Specifications for Staked Barrier with 18oz fabric

	ENGLISH	METRIC	TESTING METHOD
Weight	18 oz./yd ²	610 g/m ²	FS 5040 / ASTM D3776
Std. Dimensions	44 in. high x 100 ft	1.13m high x 30.5m	
Construction	9 x 9/1" by 840 x 840	4 x 4/cm by 924 x 924	
Grab Tensile	281 x 247 lbs./2"	1250 x 1100 N/5 cm	FS 5100 / ASTM D5034
Tongue Tear	51 x 45 lbs./1"	225 x 200 N/2.5 cm	FS 5134 / ASTM D2261
Adhesion	20 lbs./2"	90 N/5 cm	FS 5970 / ASTM D751
Finish	Matte		
Cold Crack	-4° F	-20° C	FS 5874 / ASTM D2136
Fire Retardant	Self Extinguishing		Pass

All seams heat sealed

Stakes are not included

Standard size: 100ft. length X 44 in.